


# AUBO-i3

## i Series Collaborative Robot



**3KG**  
PAYLOAD

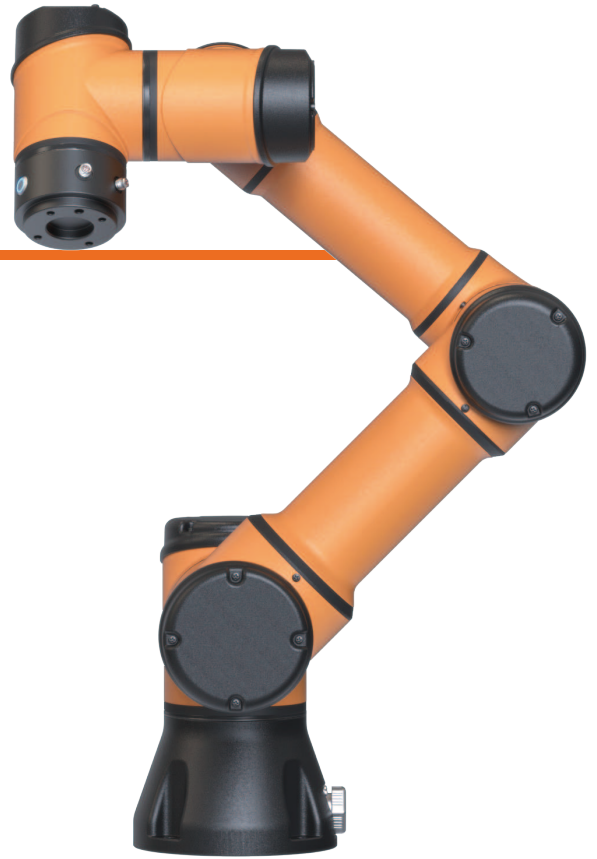

**16.4KG**  
WEIGHT



**±0.02mm**  
REPEATABILITY



**625mm**  
WORKING RADIUS

- ✓ Ultra-lightweight: 16.4kg self-weight
- ✓ Performance: 3kg payload | 625mm max reach
- ✓ Advantage: Compact, portable, and minimal footprint

### Applications

3C, Automotive, New Energy, Semiconductors, Machining, Hardware & Appliances, Kitchen/Bath, Healthcare, Research & Education, F&B (Food & Beverage), New Retail, Daily Chemicals, Logistics.



### CERTIFICATIONS

- ISO 13849(PL d with Cat. 3)
- CE Certification
- NRTL Certification
- KCs Certification
- CR Certification
- SEMI S2 Certification
- RoHS Certification
- ISO class 4 Cleanroom ISO Class 4



### Features & Advantages

(Compared to the previous generation of products)

- 01 Higher Precision:**  
Optimized repeatability and power-on accuracy. Millisecond response ensures smooth and precise trajectories.
- 02 Increased Speed:**  
Operating speed boosted by 10%-20% for highly efficient 6-DOF performance and maximum productivity.
- 03 Stronger Functionality:**  
Open platform with flange RS485, high-current support, and new end-effector drag-to-teach. Seamless integration with diverse grippers, vision, and mobile peripherals.
- 04 Superior Safety:**  
Fully certified and highly stable. Upgraded collision detection enables fenceless, ultra-safe human-machine collaboration.



High Performance



High Precision



Rapid Response



Safe and Stable



Flexible Production



Fine Craftsmanship



Compact and Lightweight



Modular Design



High Protection Class



...

