


# AUBO-i10

## i Series Collaborative Robot

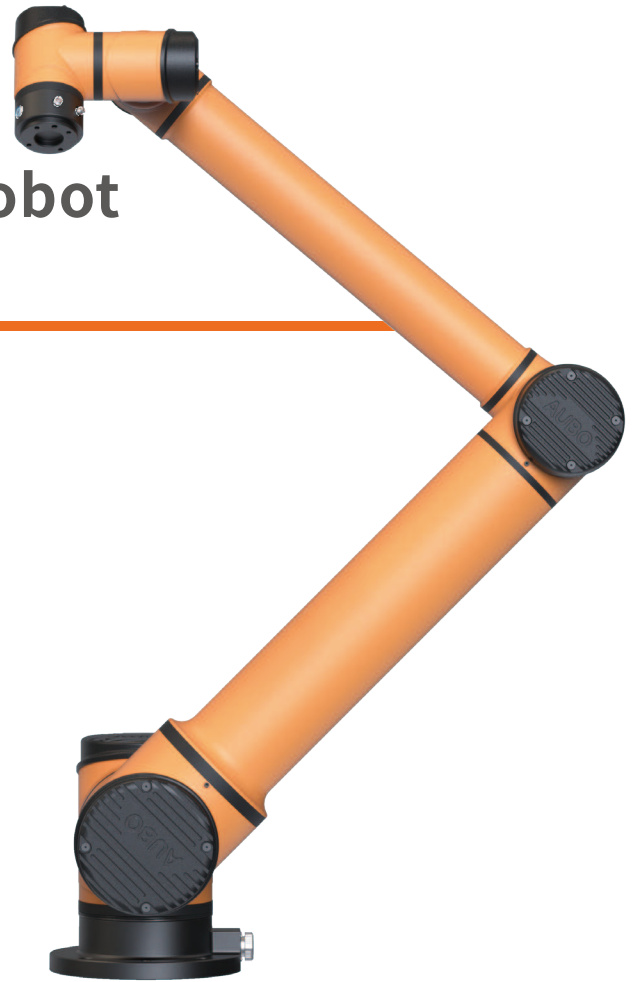

**10KG**

PAYLOAD



**39.2KG**

WEIGHT



**±0.03mm**

REPEATABILITY



**1350mm**

WORKING RADIUS

- ✓ The AUBO-i10 cobot features a maximum working radius of 1350mm.
- ✓ Payload of 10kg, combined with a repeatability of ±0.03mm.
- ✓ Heavy payload and extensive reach.

### Applications

3C, Automotive, New Energy, Semiconductors, Machining, Hardware & Appliances, Kitchen/Bath, Healthcare, Research & Education, F&B (Food & Beverage), New Retail, Daily Chemicals, Logistics.



#### CERTIFICATIONS

- ISO 13849(PL d with Cat. 3)
- CE Certification
- NRTL Certification
- KCs Certification
- CR Certification
- SEMI S2 Certification
- RoHS Certification
- ISO class 4 Cleanroom ISO Class 4



### Features & Advantages

(Compared to the previous generation of products)

- 01 Higher Precision:**  
Optimized repeatability and power-on accuracy. Millisecond response ensures smooth and precise trajectories.
- 02 Increased Speed:**  
Operating speed boosted by 10%-20% for highly efficient 6-DOF performance and maximum productivity.
- 03 Stronger Functionality:**  
Open platform with flange RS485, high-current support, and new end-effector drag-to-teach. Seamless integration with diverse grippers, vision, and mobile peripherals.
- 04 Superior Safety:**  
Fully certified and highly stable. Upgraded collision detection enables fenceless, ultra-safe human-machine collaboration.



High Performance



High Precision



Rapid Response



Safe and Stable



Flexible Production



Fine Craftsmanship



Compact and Lightweight




Modular Design




High Protection Class




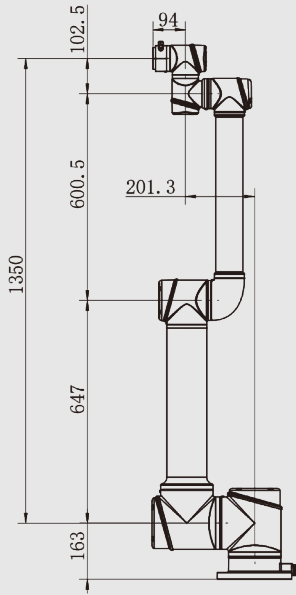


**AUBO-i10 Dimensions Diagram**

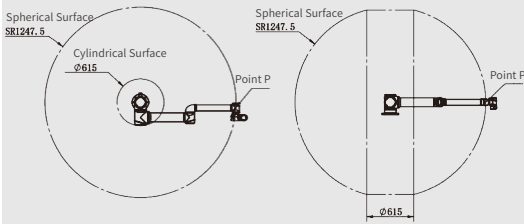

**AUBO-i10 Point P Motion Range**

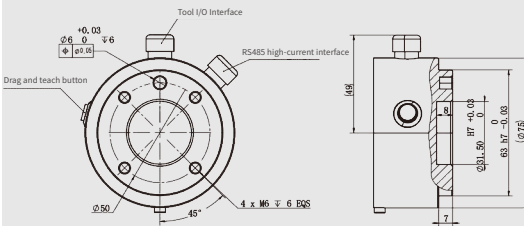


**AUBO-i10 End Flange**

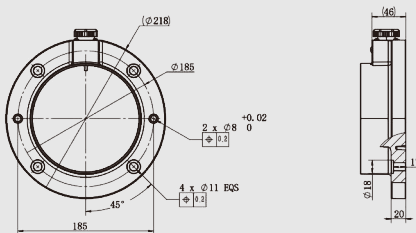

**AUBO-i10 Base Top View**

### Robot

Degrees of Freedom	6
Max Working Radius (mm)	1350
Payload (kg)	10
Weight (kg)	39.2
Footprint Diameter (mm)	Ø218
Repeatability (mm)	±0.03
Tool Speed (m/s)	≤4.0
Average Power (W)	500
Peak Power (W)	2000
Operating Temp. Range (°C)	0-50
Operating Humidity	90% RH (Non-condensing)
Mounting	Any angle
IP Classification	IP54

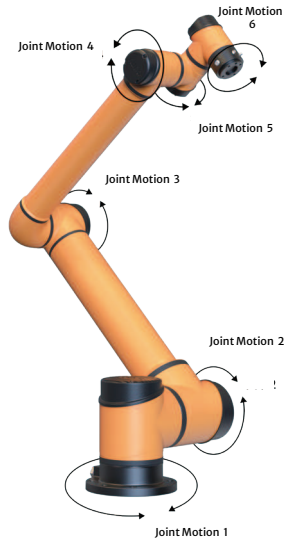

### Joint Motion

Joint Motion	Range of Motion(°)	Max Speed (°/s)
joint 1	±360	178
joint 2	±360	178
joint 3	±167	223
joint 4	±360	237
joint 5	±360	237
joint 6	±360	237

\* Joint motion capabilities may be limited by application scenarios; maximum speeds may not be reached. Please note this during use.

### Control Cabinet

Product Model	AUBO-CB-IS
Dimensions (L*H*W)	400mm*320mm*160mm
Weight	12.5kg
Robot Arm Cable Length	5m (Customizable, up to 8m)
Teach Pendant Cable Length	4m
Power Cable Length	5m
Communication Protocols	Ethernet, ModBus-RTU/TCP, Profinet, Ethernet/IP (Optional)
Interfaces & Openness	SDK (C/C++/C#/Lua/Python/JavaScript Windows + Linux ), supporting ROS/ROS2, AP
Power Supply	115/230VAC, 50/60Hz
IP Classification	IP43



### I/O Interfaces

	Control Cabinet	Tool End
I/O Interfaces		
Digital Input	16(Standard),16(Configurable)/8(Safety)	4 (Configurable)
Digital Output	16(Standard),16(Configurable)/8(Safety)	4 (Configurable)
Analog Input	2	2
Analog Output	2	-
RS485 Communication	2	1 (Configurable)
I/O Power		
Output Voltage	24V	0V/12V/24V
Output Current	3A Max	2A (3A Max)

### Teach Pendant

Product Model	AUBO-TP-IS
Dimensions (L*H*W)	254mm*213.1mm*40.8mm
Weight	1.0kg
IP Classification	IP54
Color	Orange + Black



### Disclaimer

- The content of this product datasheet is subject to change without prior notice.
- This product datasheet is the intellectual property of our company, and all rights are reserved. Any reproduction or citation of the content must indicate the source. Unauthorized reproduction is strictly prohibited; violators will be considered infringing and will be held legally liable in accordance with the law.

