

AUBO-iS10

iS Series Collaborative Robot



12 KG

PAYLOAD



36 KG

WEIGHT



±0.03mm

REPEATABILITY



1300 mm

WORKING RADIUS

- ✓ AUBO-iS10 high-performance collaborative robot, designed for high-speed operation in complex and sensitive environments
- ✓ Payload: 12 kg, Reach: 1457 mm, Max. Working Radius: 1300 mm
- ✓ High performance, fast response, compact and lightweight

Applications

The iS Series is suitable for a wide range of industrial applications, especially precision manufacturing, spraying, and sensitive-environment operations



CERTIFICATIONS

- ISO 13849(PL d with Cat. 3)
- CE Certification
- RoHS Certification
- Reach Certification
- KCs Certification
- North American Safety Certification



Features & Advantages

- 01 Modular Design, Easy Replacement:** Integrated modular design with 6 standard module specifications, enabling quick replacement and easier maintenance
- 02 Enhanced Performance, Higher Accuracy and Speed:** Repeatability, absolute accuracy, and trajectory accuracy are all significantly improved, with faster robot
- 03 New Design, Stronger Protection:** Payload-to-weight ratio up to 1:3.2. Optimized core components and upgraded control algorithm. Fully enclosed structure with a protection rating of up to IP68
- 04 Compact, Flexible, and Widely Applicable:** New teach pendant weighs only 1 kg. New control cabinet reduces floor space by more than 50%



High Performance



High Precision



Fast Response



Flexible Production



Precision Machining



Safety and Stability




High Protection Grade




Compact Footprint




Modular Design

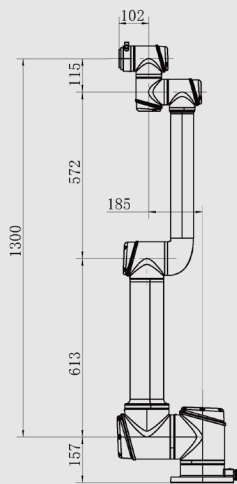


AUBO-iS10 Dimensions Diagram

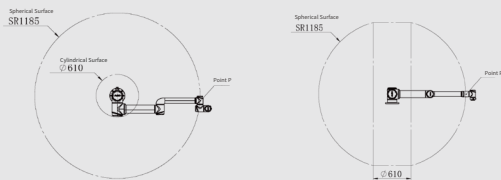

AUBO-iS10 Point P Motion Range

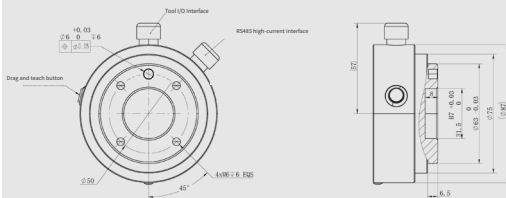


AUBO-iS10 End Flange

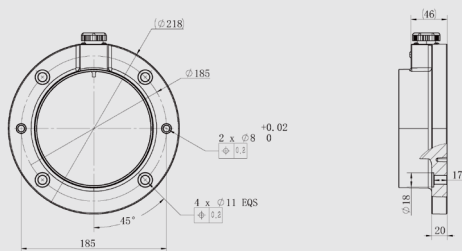

AUBO-iS10 Base Top View

Specification

Degrees of Freedom	6
Max Working Radius	1300 mm
Payload	12 kg
Weight	36 kg
Footprint Diameter	Ø218
Repeatability	±0.03
Tool Speed	≤4 m/s
Average Power	500 W
Peak Power	2000 W
Operating Temp. Range	0-50 °C
Operating Humidity	90% RH (Non-condensing)
Mounting	Any Angle
IP Classification	IP67

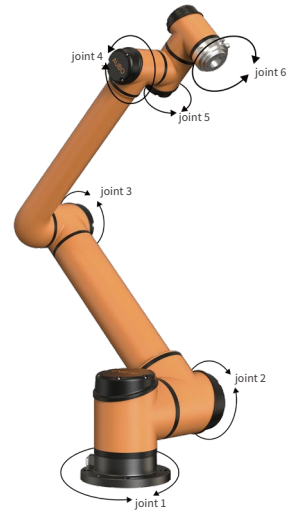

Joint Motion	Joint 1	Joint 2	Joint 3	Joint 4	Joint 5	Joint 6
Range of Motion	±360°	±360°	±167°	±360°	±360°	±360°
Max Speed	178 °/s	178 °/s	237 °/s	296 °/s	296 °/s	296 °/s

*Joint motion capabilities may be limited by application scenarios; maximum speeds may not be reached. Please note this during use.

Control Cabinet

Product Model	AUBO-CB-iS
Dimension (L*W*H)	400 mm*160 mm*320 mm
Weight	12.5 kg
Robot Arm Cable Length	5 m (Customizable, up to 8 m)
Teach Pendant Cable Length	4 m
Power Cable Length	5 m
Communication Protocols	Ethernet, ModBus-RTU/TCP, Profinet Ethernet/IP (Optional)
Interfaces & Openness	SDK (C/C++/C#/Lua/Python/JavaScript Windows + Linux) Supporting ROS/ROS2, AP
Power Supply	115/230VAC, 50/60Hz
IP Classification	IP43



I/O Interfaces	Control Cabinet	Tool End
I/O Interfaces	Digital Input	16 (Standard), 16 (Configurable) / 8 (Safety)
	Digital Output	16 (Standard), 16 (Configurable) / 8 (Safety)
	Analog Input	2
	Analog Output	2
	485 Communication	2
I/O Power	Output Voltage	24 V
	Output Current	3A Max

Teach Pendent

Product Model	AUBO-TP-IS
Dimension (L*W*H)	254 mm*213.1 mm*40.8 mm
Weight	1.0 kg
IP Classification	IP54
Color	Orange + Black



Disclaimer:

- The contents of this product brochure are subject to change without prior notice.
- This product brochure is copyrighted by the company. Any reproduction or quotation of its contents must clearly indicate the source. Unauthorized reproduction or distribution without permission may be considered infringement, and legal responsibility will be pursued in accordance with applicable laws.

