

AUBO-iS25

iS Series Collaborative Robot



25 KG
PAYLOAD



75.6 KG
WEIGHT



±0.05 mm
REPEATABILITY



1700 mm
WORKING RADIUS

- ✓ AUBO-iS25 high-performance collaborative robot, designed for high-speed operation in complex and sensitive environments
- ✓ Payload: 25 kg, Reach: 2910.5 mm, Max. Working Radius: 1700 mm
- ✓ High performance, fast response, compact and lightweight

Applications

The iS Series is suitable for a wide range of industrial applications, especially precision manufacturing, spraying, and sensitive-environment operations



CERTIFICATIONS

- ISO 13849(PL d with Cat. 3)
- CE Certification
- RoHS Certification
- Reach Certification
- KCs Certification
- North American Safety Certification



Features & Advantages

- 01 Modular Design, Easy Replacement:** Integrated modular design with 6 standard module specifications, enabling quick replacement and easier maintenance
- 02 Enhanced Performance, Higher Accuracy and Speed:** Repeatability, absolute accuracy, and trajectory accuracy are all significantly improved, with faster robot
- 03 New Design, Stronger Protection:** Payload-to-weight ratio up to 1:3.2. Optimized core components and upgraded control algorithm. Fully enclosed structure with a protection rating of up to IP68
- 04 Compact, Flexible, and Widely Applicable:** New teach pendant weighs only 1 kg. New control cabinet reduces floor space by more than 50%



High Performance



High Precision



Fast Response



Flexible Production



Precision Machining



Safety and Stability



High Protection Grade




Compact Footprint



Modular Design



Degrees of Freedom	6
Max Working Radius	1700 mm
Payload	25 kg
Weight	75.6 kg
Footprint Diameter	Ø282
Repeatability	± 0.05
Tool Speed	≤ 3 m/s
Average Power	1000 W
Peak Power	3000 W
Operating Temp. Range	0-50 °C
Operating Humidity	90% RH (Non-condensing)
Mounting	Any Angle
IP Classification	IP54 (IP67 optional)

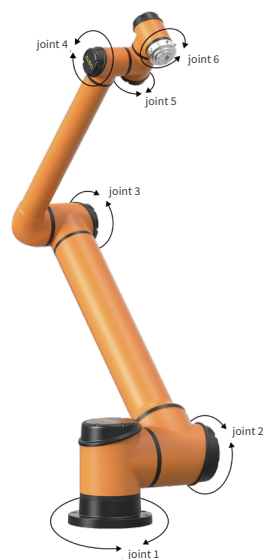

*Joint motion capabilities may be limited by application scenarios; maximum speeds may not be reached.
Please note this during use.

Product Model	AUBO-CB-IS	
Dimension (L*W*H)	400 mm*160 mm*320 mm	
Weight	12.5 kg	
Robot Arm Cable Length	5 m (Customizable, up to 8 m)	
Teach Pendant Cable Length	4 m	
Power Cable Length	5 m	
Communication Protocols	Ethernet, ModBus-RTU/TCP, Profinet Ethernet/IP (Optional)	
Interfaces & Openness	SDK (C/C++/C#/Lua/Python/JavaScript Windows + Linux) Supporting ROS/ROS2, AP	
Power Supply	115/230VAC, 50/60Hz	
IP Classification	IP43	



I/O Interfaces		Control Cabinet	Tool End
I/O Interfaces	Digital Input	16 (Standard), 16 (Configurable) / 8 (Safety)	4 (Configurable)
	Digital Output	16 (Standard), 16 (Configurable) / 8 (Safety)	4 (Configurable)
	Analog Input	2	2
	Analog Output	2	-
	485 Communication	2	1 (Optional)
I/O Power	Output Voltage	24 V	0V/12V/24V
	Output Current	3A Max	2A (3A Max)

Product Model	AUBO-TP-IS
Dimension (L*W*H)	254 mm*213.1 mm*40.8 mm
Weight	1.0 kg
IP Classification	IP54
Color	Orange + Black



Revision Date: June 26th, 2026

