


AUBO-iS35

iS SERIES

COLLABORATIVE ROBOT

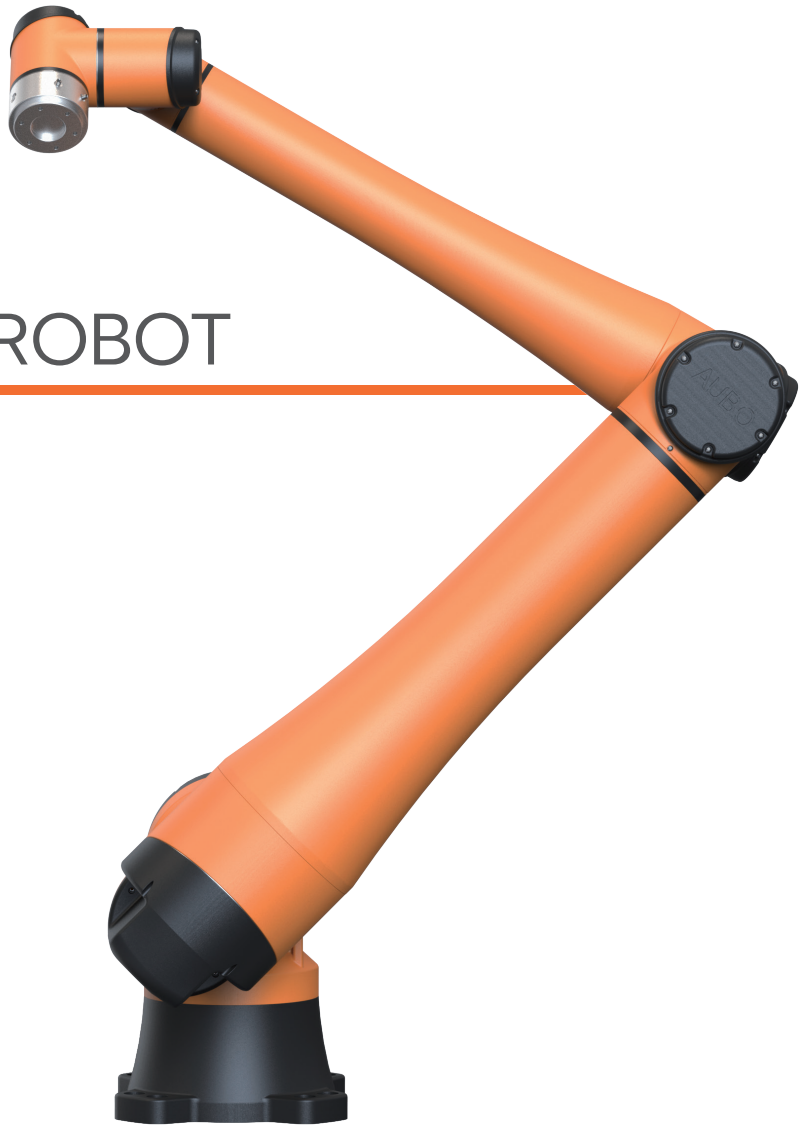

35KG

Payload



150KG

Weight



±0.05mm

Repeatability



2100mm

Working Radius

- ✓ AUBO-iS35 can achieve a maximum payload of 35kg, Its joints can rotate to $\pm 360^\circ$
- ✓ Maximum working radius is 2100mm with ± 0.05 mm repeatability
- ✓ Suitable for various heavy-load application scenarios

Applications

The iS-series is suitable for a wide range of industrial scenarios and is particularly suited for advanced manufacturing, painting, and specialized applications in harsh environments.



Features and Benefits

- 01 Modular Design, Easy to Replace Joints** AUBO iS-series cobots feature an integrated modular design with six standard modules of different specifications in total, allowing for quick replacement and more convenient maintenance and repair.
- 02 Enhanced Performance, Precision and Efficiency** Compared to the previous generation, there is an overall improvement in the repeatability, absolute repeatability, and trajectory repeatability while operating at a much higher speed.
- 03 New Design, Higher Protection Level** The load-to-self weight ratio can reach 1:3.2. Core components have been optimized with new control algorithms. The fully enclosed structure allows for a maximum protection level of IP68.
- 04 Compact and Flexible, Wide Application** The new teach pendant weighs only 1kg, and the floor space of the new control cabinet is reduced by 50%. AUBO iS-series cobots also come with a multifunctional tool end, enabling a broader range of applications.



High Performance



High Precision



Rapid Response



Safe and Stable



Modular Design



Flexible Production



Precision Engineered




High IP Level




Compact and Lightweight


••• Others

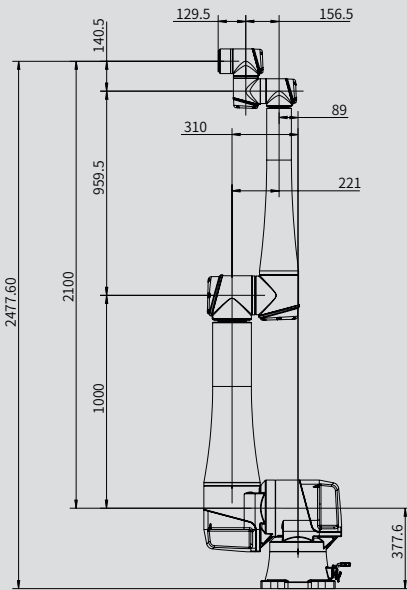


AUBO-iS35 Dimensions

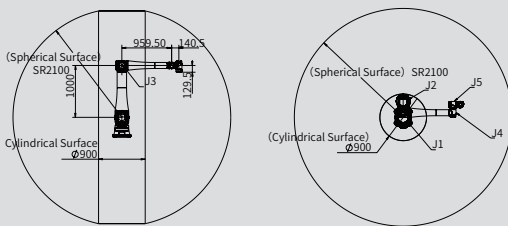

AUBO-iS35 Moving Range of Point P

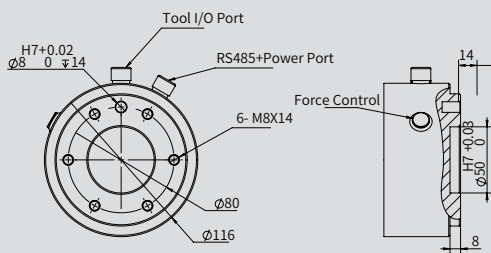


AUBO-iS35 Tool End Flange

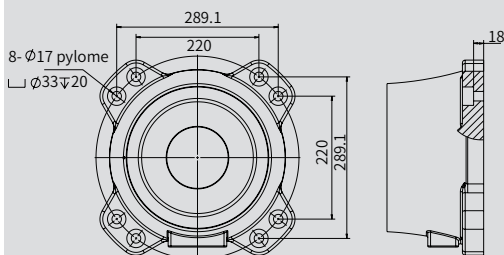

AUBO-iS35 Top View of Base

Robot

Degrees of Freedom	6
Reach (mm)	2100
Payload (kg)	35
Weight (kg)	155
Mounting Surface Diameter (mm)	Ø425
Repeatability (mm)	±0.05
Linear Velocity (m/s)	<6
Average Power(W)	2000
Peak Power (W)	6000
Ambient Temperature (C)	0-50
Ambient Humidity	90% RH (Non-condensing)
Installation Orientation	Any ceiling, Floor, Wall
IP Classification	IP67
ISO 14644-1 Cleanliness Class	5

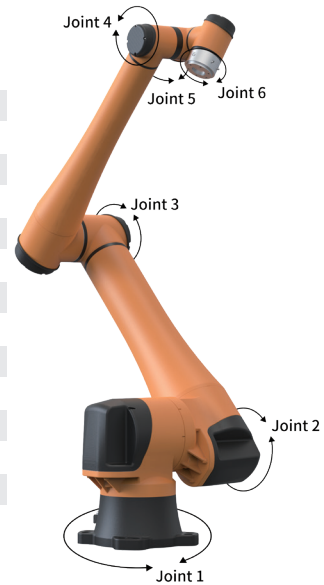

Axis Movement

	Working Range (°)	Maximum Speed (°/s)
joint 1	±360	148.7
joint 2	±360	148.7
joint 3	±168	178
joint 4	±360	296.3
joint 5	±360	296.3
joint 6	±360	296.3

*Each joint has the ability of ±360 but is limited by the application scenario. Some joints may not be reached.

Control Box

Model	AUBO-CB-iS-H
Size (L*W*H)	400mm*240mm*320mm
Weight	18kg
Cable Connecting the Robot	5m(customizable, up to 8m)
Cable Connecting the Teach Pendant	3m
Cable Connecting the Power	5m
Communication	Ethernet, ModBus-RTU/TCP, Profinet/ EtherNet/IP (Optional)
Interface	SDK(support C/C++/C#/Lua/Python)- Support ROS- API
Power Supply	100-240VAC,50-60Hz
IP Classification	IP43



AUBO-CB-iS-H

Control Box I/O, Tool I/O

I/O Port	Digital In	Control Box	Tool
	Digital Out	8 (general) /8 (safe)	4(optional)
	Analog In	8 (general) /8 (safe)	4(optional)
	Analog Out	2	2
	RS485	2	-
		1	1
I/O Power	Output Voltage	24V	0V/12V/24V
	Output Current	2A	Rated 2A/Peak 3A

Teach Pendant

Model	AUBO-TP
Dimensions	254mm*213.1mm*40.8mm
Weight	1kg
IP Classification	IP43
Colors	Orange + black



Disclaimer

1. The content of this product catalog is subject to change without prior notice.
 2. This product catalog is an original work of our company and all copyrights belong to us. Please cite the source when reprinting or quoting content from this catalog. Unauthorized reproduction is prohibited and will be considered an infringement, for which legal liability will be pursued according to law.